

Typhoon and Streamline

Applications

For subsurface or surface installations in row crops for seasonal crops such as tomatoes, mellons, and vegetables

Features and Benefits

- Injection molded dripper
- Seamless construction of tubing
- Industries lowest filtration requirement
- Large filter inlets to reduce clogging
- Industries widest flow path
- Wide range of flow rates, dripper spacing, and diameters
- Row length of up to 2000ft



Streamline and Typhoon				
	Wall Thickness (mil)	Inside Diameter (inches)	Nominal Flow Rates (GPH@10psi)	Common Spacings (Inches)
Streamline 630	4,6,8,10	0.636	.16,.22,.38	8",10",12",16",18",24"
Streamline 875	6,8,10	0.875	.16,.22,.38	8",12",16",18"
Typhoon 630	8,10,13,15	0.636	.18,.24,.36,.58	12",16",18",24",30"
Typhoon 875	8,10,13,15	0.875	.18,.24,.36,.58	12",16",18",24",30"



SOUTHERN DRIP IRRIGATION

Lethbridge, Alberta
 phone: 403-394-0042
 fax: 403-394-9515



Chilliwack, British Columbia
 phone: 604-792-0041
 fax: 604-792-9515

www.southerndrip.com

Applications

Orchard, Vineyard, Nursery, and Permanent Row Crops

Features and Benefits

- Pressure compensating benefits at the lowest operating pressure.
- Achieves up to 15% energy savings.
- Wide range of flow rates.
- Industries most reliable dripper.
- Industries largest filtration area.
- Industries widest dripper flow path.
- Continuous self cleaning dripper.
- Dripper comes with built in anti-siphon mechanism
- Unique low profile dripper design reduces friction loss allowing for longer row lengths.



Specifications

Nominal Flow Rates (GPH): 0.26, .042, 0.53, 0.61, 0.92




Common Dripper Spacings: 18", 24", 30", 36", 60"

Inside Diameters: 0.54" (16mm, 45 mil)

0.57" (17mm, 45mil)

0.62" (18mm, 45mil)

0.69" (20mm, 48mil)

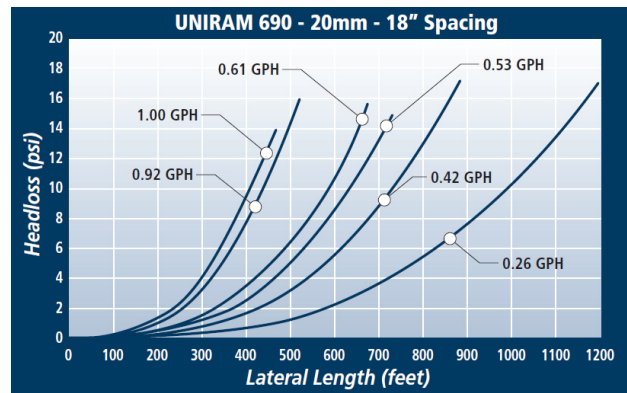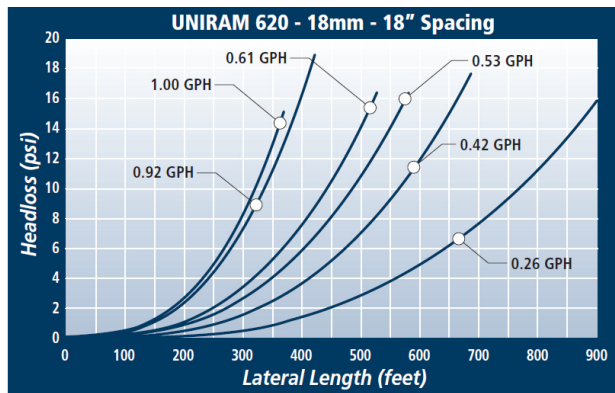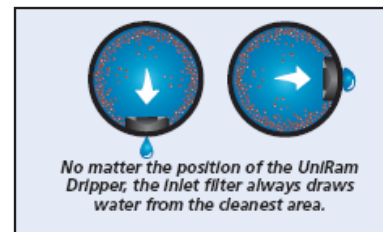

SOUTHERN DRIP IRRIGATION

Lethbridge, Alberta
phone: 403-394-0042
fax: 403-394-9515



Chilliwack, British Columbia
phone: 604-792-0041
fax: 604-792-9515

www.southerndrip.com