




Sump Pumps



5030CVSP

- Construction - Rugged cast iron construction
- Split Capacitor Motor - 3/10 HP continuous duty, thermal protected
- Pumps up to 46 gallons per minute
- Pump will lift water up to 25' of vertical height
- Power Cord - 10 ft. power cord, 25' cords available for an additional charge
- Discharge - Large 1 1/2" discharge for high capacity pumping
- Can be used as a utility pump by removing the float switch

Sump Pump Performance Curve

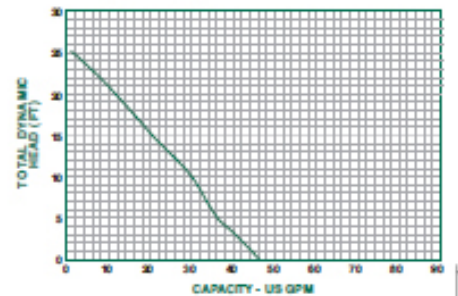


PERFORMANCE CHART	
MODEL	GALLONS PER MINUTE IN FEET
5030CVSP	0 5 10 15 20 25
	46 36 30 25 12 1



5050CVSP

- Construction - Rugged cast iron construction
- Split Capacitor Motor - 1/2 HP continuous duty, thermal protected
- Pumps up to 70 gallons per minute
- Pump will lift water up to 25' of vertical height
- Power Cord - 10 ft. power cord, 25' cords available at an additional charge
- Discharge - Large 1 1/2" discharge for high capacity pumping
- Can be used as a utility pump by removing the float switch

Sump Pump Performance Curve

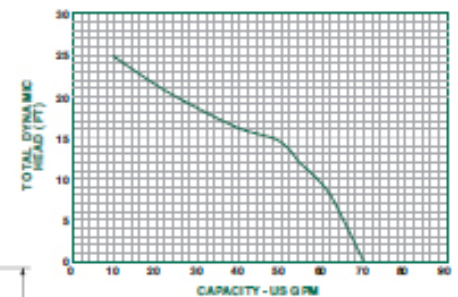

PERFORMANCE CHART	
MODEL	GALLONS PER MINUTE IN FEET
5050CVSP	0 5 10 15 20 25
	70 66 58 48 25 10

SOUTHERN DRIP IRRIGATION

Lethbridge, Alberta
 phone: 403-394-0042
 fax: 403-394-9515




Chilliwack, British Columbia
 phone: 604-792-0041
 fax: 604-792-9515

www.southerndrip.com




Sewage and Effluent


Effluent

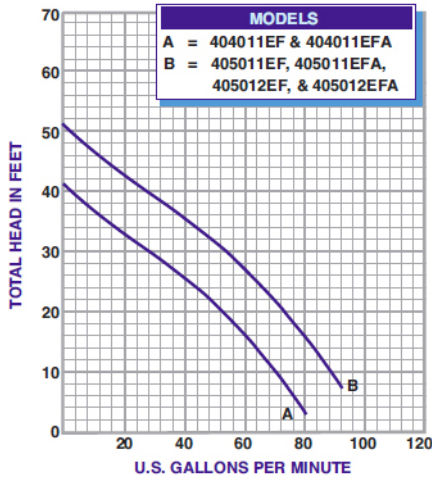


Sewage

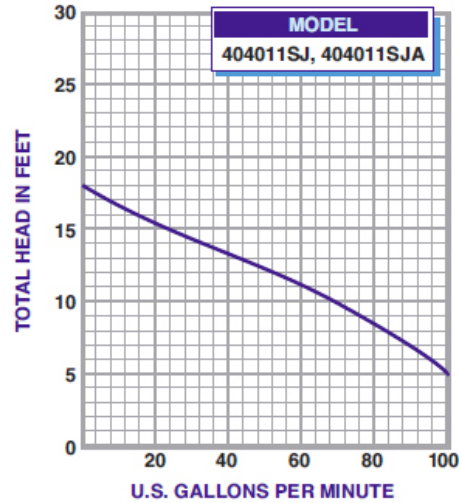

Sewage

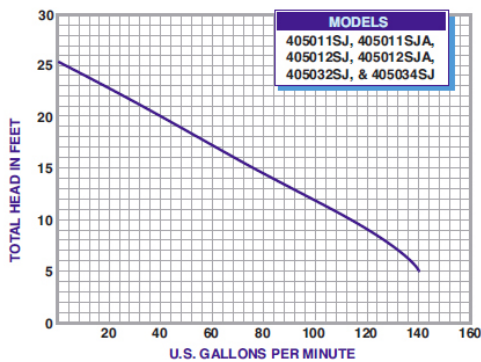

Sewage

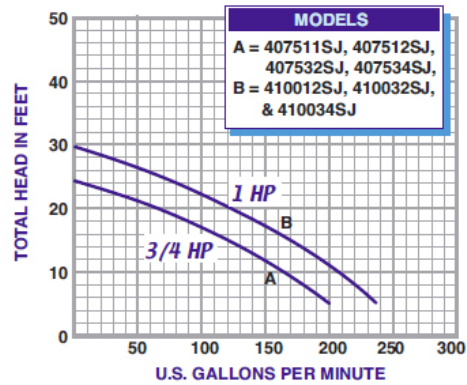

Model #	Effluent/Sewage	HP	Voltage	Max Amps
404011EF	Effluent	4/10	115	9.1
405011EF	Effluent	1/2	115	13.2
410012EF	Effluent	1	230	13.0
410032EF	Effluent	1	208-230 3 PH	6.4-5.8
404011SJ	Sewage	4/10	115	6.6
405011SJ	Sewage	1/2	115	10.6
410012SJ	Sewage	1	230	10.0
410032SJ	Sewage	1	208-230 3 PH	5.5-5.0

SOUTHERN DRIP IRRIGATION

Lethbridge, Alberta
 phone: 403-394-0042
 fax: 403-394-9515



Chilliwack, British Columbia
 phone: 604-792-0041
 fax: 604-792-9515

www.southerndrip.com